



Data Sheet EPI 56


Press head EPI 56 Specifications

- In line or parallel Version
- Working versions position: Vertical, Horizontal, Sub-vertical, Universal Parallel
- Threaded bolts or screws "TX" version
- Work force at 6 bar : 33,0 kN
- Approach force at 6 bar : 2,7 kN
- Total force at 6 bar : 35,7 kN
- Return force at 6 bar : 2,5 kN
- Standard total strokes : 45-75-115-165 mm
- Standard working strokes : 5-10-15 mm
- Approaching recommended speed : 0,3 m/sec
- Anodized aluminium
- Standard magnetic unit
- Connection with high pressure chamber
- Adjustable return stroke cushioning
- Rod connection model "AF" or "AS" or "AT"
- Possibility to manage the working cycle in an independent way from the approaching phase
- Possibility to manage the unit with low pressure
- Without external tank
- 3D or 2D drawings on request
- Usage instructions in pdf format
- Incorporation statement
- Unit testing certificate

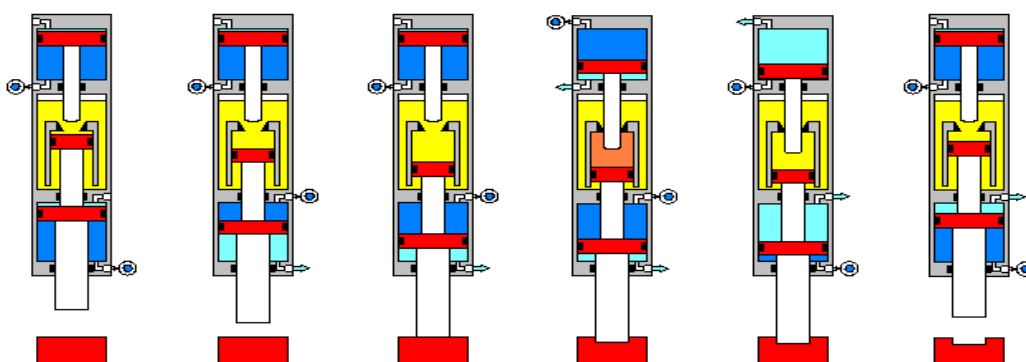

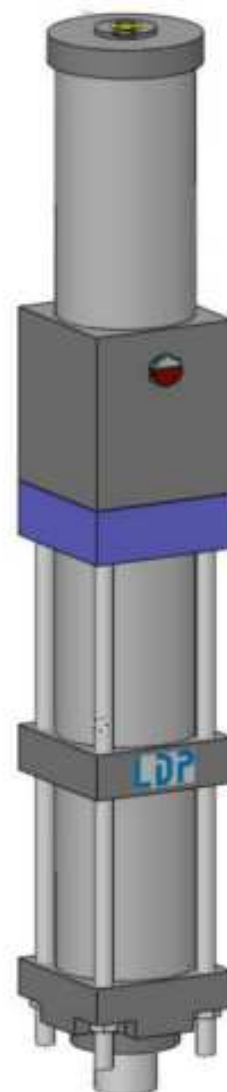


Tot.Stroke 45 mm	L mm	Tot.Stroke 75 mm	L mm	Tot.Stroke 115 mm	L mm	Tot.Stroke 165 mm	L mm
40-05	544	70-05	604	110-05	684	160-05	784
35-10	594	65-10	654	105-10	734	155-10	834
30-15	644	60-15	704	100-15	784	150-15	884

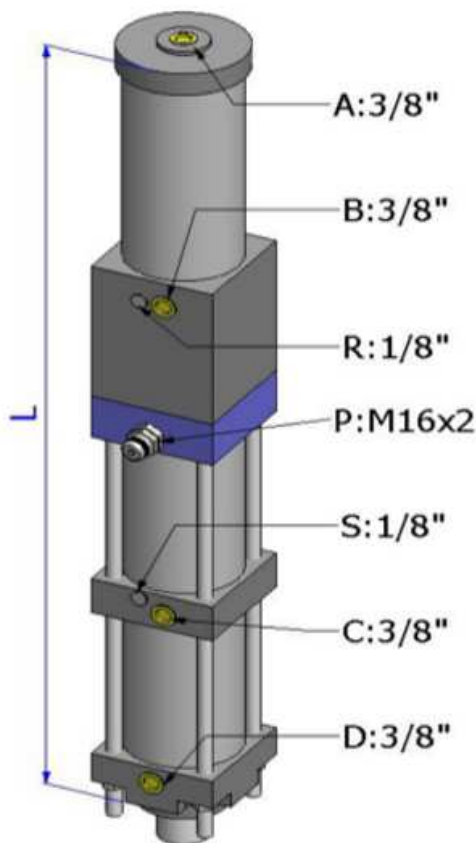


Connections chart

A= Force cylinder forward
B= Force cylinder return
C= Approach cylinder forward
D= Approach cylinder return
P= Pressure tap
R= Oil topping up
S= Oil drain


Threaded bolts unit version

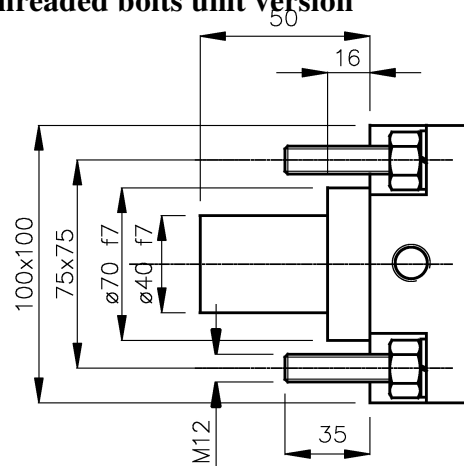

Screw unit version mod. "TX"

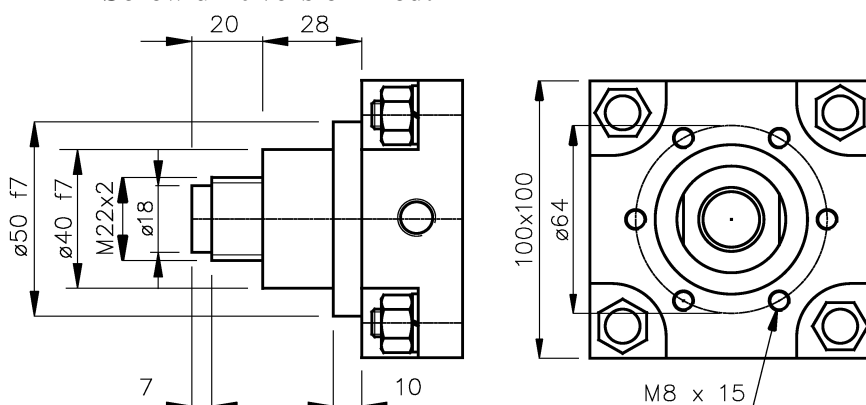

Rod Connection

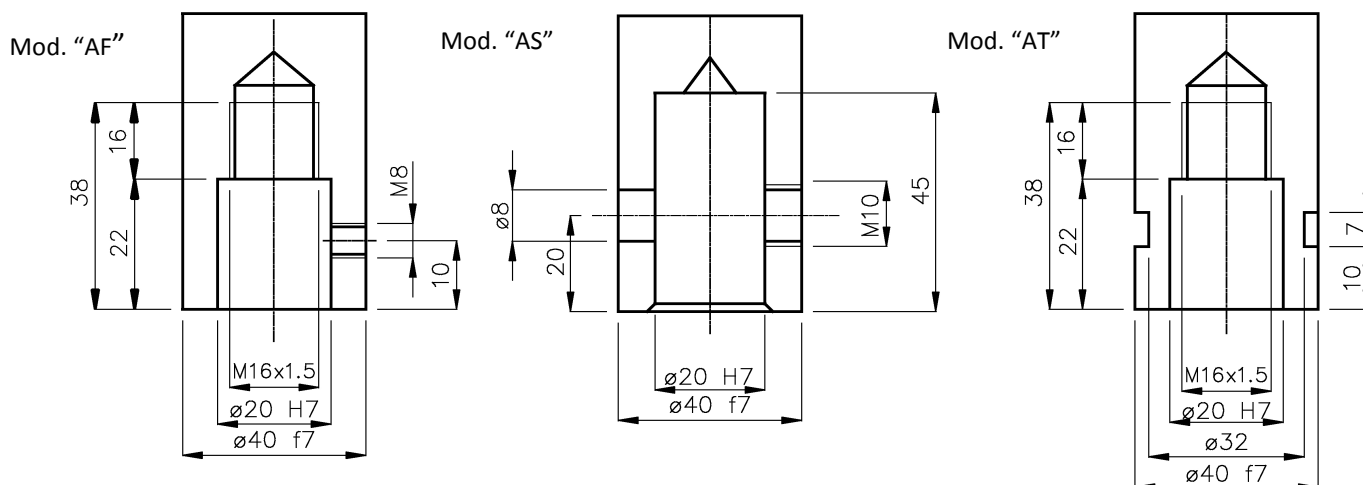

PRODUCTION PROGRAMME:

- Pressure booster, Air-Oil cylinders

- E-Type, CS-Type, KS-Type and special Press heads - Clicching systems

- Pneumatic and Hydropneumatic units with swan neck as well as pillars type

LDP thrust technology

ADMINISTRATION DEPARTMENT :

Via Puccini, 13 - I- 20085 Locate T. (MILANO) Italia
Ph. 0039 - 02 90731137 Fax 0039 - 02 90730659

FACTORY :

Via Del Lavoro, 8 - I- 24050 Bariano (BERGAMO) Italia
Ph. 0039 - 0363 95096 Fax 0039 - 0363 959210

<http://www.ldpitalia.com>

E-mail: info@ldpitalia.com

DISTRIBUTED BY: