




Marking




Pressing




Forming




Punching




Bending



Riveting





Clinching



Mounting

Hydropneumatic Presses GN-Type

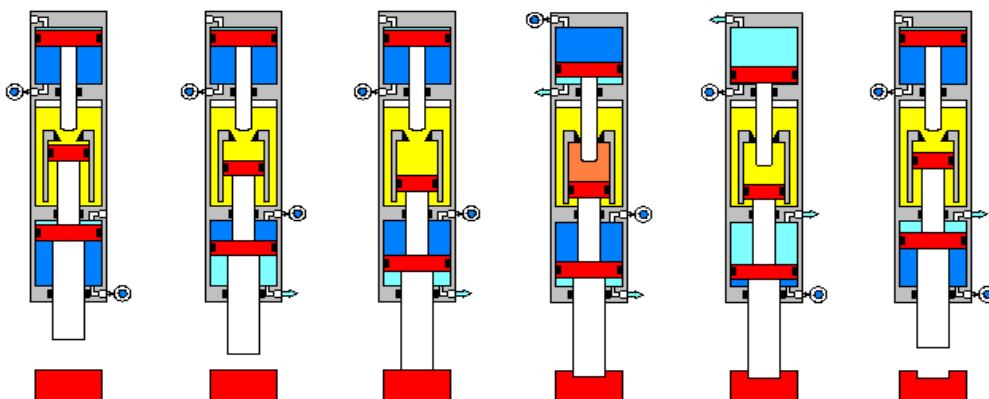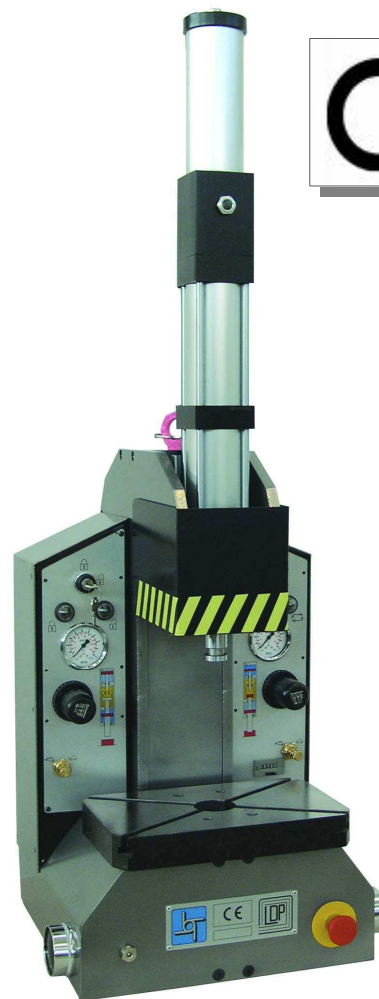



TECHNICAL FEATURES



The GN-Type hydropneumatic Presses are particularly suitable for operations where a fair thrust and a relatively short stroke are required. A mechanical stroke adjustment facility RMA is available on request. Concentricity between the press head centerline and the component location on the press base is ensured

- 6 models with 100 mm approach stroke + 15 mm work
- Available thrusts range from 22 to 235 kN at 6 bar pressure
- Optional mechanical adjustment stroke RMA
- Concentricity stem - bolster plate work
- Max operating air pressure is 6 bar
- CE certification n° 211 ICIM
- The bolster plate is provided of T-slots



GN 05 fitted with a load cell.

MODEL	Approach Thrust kN	Return Thrust kN	Work Thrust kN
GN 02	1,9	1,8	22,0
GN 05	4,0	3,4	45,8
GN 08	6,2	5,4	73,9
GN 12	6,2	5,4	115,5
GN 16	10,3	9,5	150
GN 25	16,5	15,4	235,3

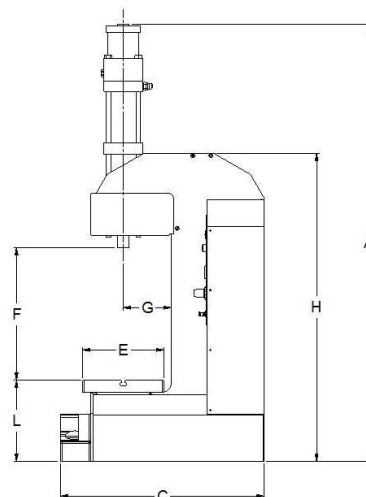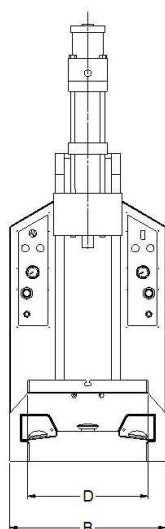

DIMENSIONS

MODEL	A	B	C	D	E	F	G	H	L
GN 02	1350	450	480	300	200	322	125	790	200
GN 05	1570	520	680	400	270	402	160	1028	270
GN 08	1725	590	735	450	300	404	180	1080	290
GN 12	1860	658	770	500	300	404	200	1175	340
GN 16	1954	658	840	500	340	440	200	1300	380
GN 25	2034	658	850	500	340	493	200	1410	405

PRODUCTION PROGRAMME:

- Pressure booster, Air-Oil cylinders

- E-Type, CS-Type, KS-Type and special Press heads—Clicnhing systems

- Pneumatic and Hydropneumatic units with swan neck as well as pillars type

LDP thrust technology

ADMINISTRATION DEPARTMENT :

Via Puccini, 13 -I- 20085 Locate T. (MILANO) Italia
Ph. 0039 - 02 90731137 Fax 0039 - 02 90730659

FACTORY :

Via Del Lavoro, 8 -I- 24050 Bariano (BERGAMO) Italia
Ph. 0039 - 0363 95096 Fax 0039 - 0363 959210

<http://www.ldpitalia.com>

E-mail: info@ldpitalia.com

DISTRIBUTED BY: